

# WIND SPEED Sensor

t031 TVV-E



- Low inertia and high resolution
- High accuracy
- Robust and easy to install
- Equipped with heating system (optional)

# Description


TVV is composed of a rotating body connected to three conical shaped elements (cups), and it measures the wind speed exploiting the wind resistance to rotational movement of the cups.

The rotating system is equipped with a six poles cylindrical magnet. A Hall effect sensor detects the rotary motion that generates in the meantime an impulse at the passage of each pole.

The dimensions of the cups and the lightness of their material have been thoroughly picked to achieve a very low mechanical inertia and, consequently, to ensure a high sensitivity of the measurement.

The structure of TVV is very robust and the sensing element has a reliable durability and a proper resistance even at high wind speeds. Furthermore, its simple and compact design facilitates the installation and makes easier the on-site maintenance activities.

The sensor is supplied with power and signal cable (12m), and it is available upon request on heated version, powered at 24V (alternating or direct current).

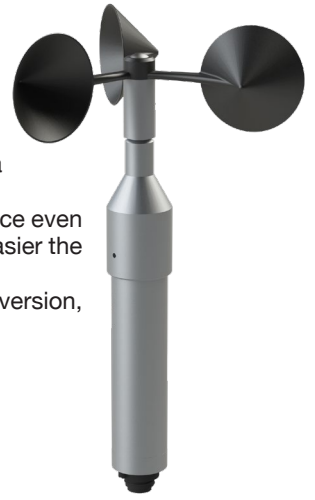

## Main features

- **Measure up to 75 m/s**
- **High accuracy**
- **Protection against overvoltages**
- **Equipped with heating system (optional)**

## Technical Specifications\*

### Measurement performance

#### Wind speed [m/s]

Transducer	6-pole magnet and stabilized Hall effect sensor
Measurement range	0 ÷ 75
Resolution	< 0.1
Accuracy	< 0.15 (0÷29); < 0.4 (30 ÷ 60); <±0.5 (61÷75)
Still air	< 0%
Onset speed	< 0.25

### Operating conditions

Temperature	-40°C ÷ +70°C
Humidity	0% ÷ 100%
Gust survival	80 m/s (more than 30 min.)

### Outputs

Natural	Open drain output: $V_v$ measurement is given by the frequency $f$ as following: $V_v = f \text{ [Hz]} / 3.3676 \text{ [Hz/ m/s]} + 0.1881 \text{ [m/s]}$
Tension	0 ÷ 2 V ↔ 0 ÷ 75 [m/s]
Current	4 ÷ 20 mA ↔ 0 ÷ 75 [m/s]
RS485-Modbus	Wind speed [m/s]
SDI – 12	Wind speed [m/s]

### Power supply and consumption

Voltage supply	7 ÷ 24 Vdc
Heating system voltage supply	9 ÷ 24 V [DC o AC]

Consumption (mA)	Min	Typical	Max
Natural	-	1	2.5
RS485-Modbus / SDI-12 / 0 ÷ 2 V	-	1	3
4 ÷ 20 mA	5	-	25

Heating system power 40 W @ 24 V

### Mechanical specifications

Protective body	Cups: PA6 + 30% fiberglass, the entire body is made of anodized aluminium alloy and stainless steel screws
Weight	750 g
Dimensions	$\varnothing_{MAX} = 230 \text{ mm}$ ; Heigh = 336 mm
Electrical connections	IP67 / 7 pole male connector

### Ordering codes

Natural output	PSM-t031-TVV-N
Current output, Tension output and RS485-Modbus output	PSM-t031a-TVV-IVS
SDI-12 serial output	PSM-t031d-TVV-12
Heated version, Natural output	PSM-t032-TVVR-N
Heated version, Current output	PSM-t032a-TVVR-I
Heated version, Tension output	PSM-t032b-TVVR-V
Heated version, serial output	PSM-t032c-TVVR-S

\*Changes on technical performances can be applied upon request of specific calibration